



| PRODUCT | MODEL | RETICLE | SKU# | BEST PRICE | SECOND PRICE |
|-------------|--------------|---------|---------|------------|--------------|
| Rifle Scope | 4-16x50FFPIR | FFP MOA | T40016S | | |
| Rifle Scope | 4-16x50SFPIR | SFP MOA | T40016 | | |

IDEAL APPLICATION



HUNTING

ALTERNATIVE APPLICATION




LONG RANGE

TOP FEATURES

- ADVANCED FULLY MULTI-COATED
- High-strength eco-friendly aluminum alloy
- Etched illuminated glass reticle
- IP67-rated dust and water resistance
- One-piece tube design, nitrogen-filled for fog resistance
- One-year replacement for product issues, lifetime warranty.

SPECS

| | |
|----------------------------------|-----------------------|
| Magnification Value (Variable): | 4x-16 |
| Objective Lens Diameter: | 50mm |
| Ocular Lens Diameter: | 35.5mm |
| Lens Coating: | Multi-coated |
| Body Tube Diameter: | 30mm |
| Length: | 358mm |
| Weight: | 695g |
| Construction type (1 / 2 Piece): | 1 PIECE |
| Color / Finish: | Black Anodized Finish |
| Windage Adjustment Range: | 50MOA |
| Elevation Adjustment Range: | 50MOA |
| Click Value: | 0.25MOA |
| Reticle Type (Etched / Wire): | Etched |
| Eye Relief: | 101-94mm |
| Exit Pupil: | 10.2mm-3.1mm |
| Field of View (FOV): | 25.3ft-6.1ft |
| Resolution (enter Axis): | 2.75" |
| Diopter Compensation: | +2/-2 |
| Waterproof (Y / N): | YES |
| Fogproof (Y / N): | YES |
| Shockproof (Y / N): | YES |

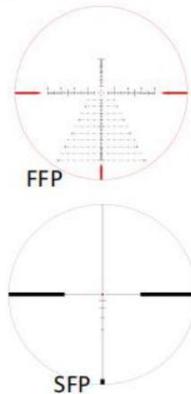


Zero Stop

Advanced adjustment allows the shooter to quickly and accurately return the knob to the original zero after elevation changes.

KEY FEATURES OF STISA GLASS RETICLE

Clear Vision: High-quality glass and coating technology ensure clear markings in all lighting conditions. **Precise Scale:** Laser-engraved for accuracy, allowing quick target adjustments. **Durable:** Impact-resistant and heat-resistant, suitable for harsh environments. **Wide Application:** Suitable for tactical shooting, sniper operations, long-range hunting, and competitive shooting, meeting the diverse needs of both military and civilian shooters.

REAL TEST RESULTS



At 100 yards, after 1000 rounds of 7.62x51mm live fire, the deviation was less than 0.75 MOA with no noticeable shift in the aiming point. Despite the strong recoil, the lenses and internal optical components remained intact, with no damage or displacement, and the optical clarity and brightness were unaffected. The external protection and internal mounting systems showed no loosening or damage, ensuring long-term aiming stability. Conclusion: The 7.62x51mm test confirms the excellent shock resistance of STISA scopes. Whether facing strong recoil or prolonged use, they consistently maintain